



WRY-H

COUPLED HIGH TEMPERATURE
OIL PUMP
联轴式高温热油泵




WRY-H 50-32-160EX

应用领域: 导热油炉、热处理设备、模板控温、辊轮控温、反应釜夹套控温等。

循环介质: 不含颗粒、纤维的导热油、热处理油等液体。


Application Area: Thermal oil furnace, Heat treatment equipment, Template temperature controlling, Roller temperature controlling, Reaction kettle.

Circulation Medium: Thermal oil, heat treated oil and other liquids without particles and fibers.

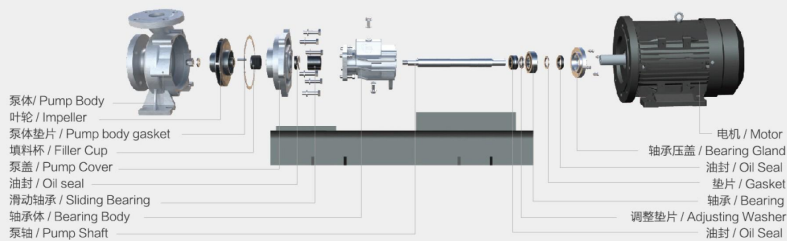

使用条件 / Working Condition

高温热油 Thermal Conductivity Oil	乙二醇 Ethylene glycol	最高海拔 Maximum Elevation	最大工作压力 Maximum Working Pressure
+5°C~+350°C	-5°C~+40°C	1000m	10bar

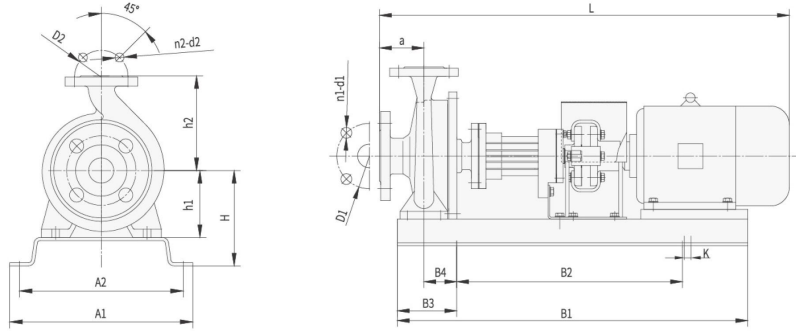

规格性能参数 / Technical Parameter

型号/Model	额定扬程 Rated Head (m)	额定流量 Rated Capacity (m³/h)	转速 Speed (r/min)	功率 Power(kW)		效率% Efficiency	汽蚀余量 NPSH (m)
				轴功率 Shaft Power	配用功率 Motor Power		
20-20-125	22	1.5	2840	0.11	0.75	30	2
32-32-160	28	6	2840	1.31	1.5	35	2.3
40-25-160	28	10	2840	1.73	2.2	44	2.3
50-32-160	30	12.5	2900	2.17	3.0	47	2.3
50-32-200	50	12.5	2900	4.3	5.5	40	2.5
50-32-200A	32	16	2900	3.7	4.0	38	2.6
50-32-250	80	12.5	2900	8.5	11	32	2.5
50-32-250A	60	16	2900	8.7	11	30	2.5
65-50-160	32	20	2900	3.17	4.0	55	2.5
65-40-200	50	25	2900	6.5	7.5	52	2.5
65-40-200A	35	25	2900	4.6	5.5	52	2.5
65-40-250	80	25	2900	11.8	15	46	3.0
65-40-250A	51	20	2900	6.3	7.5	44	3.1
65-40-315	125	25	2900	22.4	30	38	3.0
65-40-315A	100	22.5	2900	17	22	36	2.9
80-50-200	50	50	2900	10.8	15	61	3.0
80-50-200A	40	45	2900	8.2	11	60	3.0
80-50-250	80	50	2900	19.1	22	57	3.0
80-50-250A	60	43	2900	12.8	15	55	3.1
80-50-315	125	50	2900	33.41	45	51	3.0
80-50-315A	100	45	2900	24.51	30	50	3.2
100-65-200	55	100	2900	18.5	22	69	4.0
100-65-200A	44	94	2900	16.11	22	70	4.1
100-65-200B	38	87	2900	13.22	15	68	4.2
100-65-250	83	100	2900	33.74	37	67	4.3

安装尺寸表 / Installation Size

型号/Model	A1	A2	B1	B2	B3	B4	a	H	h1	h2	D1	D2	n1-d1	n2-d2	K	L
20-20-125	270	240	500	300	90	47.5	62	130	84	115	75	75	4-Ø14	4-Ø14	4-Ø14	580
32-32-160	313	280	600	380	105	37	75	160	106	135	100	100	4-Ø18	4-Ø18	4-Ø14	665
40-25-160	313	280	600	380	105	37	75	160	106	150	110	85	4-Ø18	4-Ø14	4-Ø14	695
50-32-160	330	300	740	500	115	55	80	174	116	160	125	100	4-Ø18	4-Ø18	4-Ø14	857
50-32-200(A)	405	365	800	515	138	83	80	193	132	180	125	100	4-Ø18	4-Ø18	4-Ø19	952
65-50-160	405	365	800	515	138	83	80	193	132	160	145	125	4-Ø18	4-Ø18	4-Ø18	877
65-40-200(A)	406	365	800	515	138	79.5	100	209	148	180	145	110	4-Ø18	4-Ø18	4-Ø19	972
80-50-200B	406	365	800	515	138	85	100	210	160	200	160	125	8-Ø18	8-Ø18	4-Ø19	972
50-32-250(A)	416	390	925	600	166	98	100	273	180	225	125	100	4-Ø18	4-Ø18	4-Ø25	1097
80-50-200	430	380	950	600	145	90	100	216	160	200	160	125	8-Ø18	8-Ø18	4-Ø23	1097
100-65-200(A)	470	420	1055	625	190	110	100	255	180	225	180	145	8-Ø18	4-Ø17.5	4-Ø25	1167
100-65-200B	470	420	1055	625	190	110	100	255	180	225	180	145	8-Ø17.5	4-Ø17.5	4-Ø25	1161
100-65-250	460	430	1280	840	220	130	125	305	200	250	180	145	8-Ø18	4-Ø28	4-Ø25	1422

NINE SERVICES

九大服务



AULANK

PUMPS

MANUFACTURING CO.,LTD.

